




WWW.KINSPIRE-ENERGY.COM

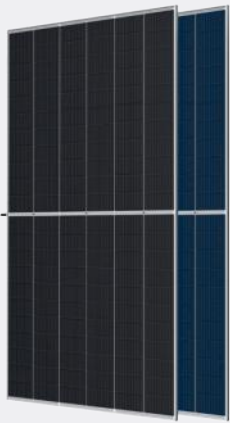

132 Cells

Bifacial Mono-crystalline 10/12BB

665-670W

Power output


21.57%

The Highest Efficiency

0~ +5W

Tolerance

0.5% Annual Degradation over 30 years

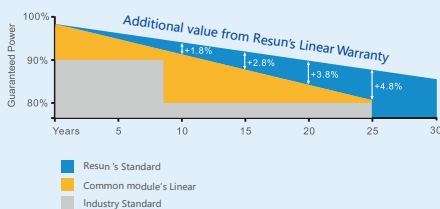

RS9H-M-BD

RS9H-M-BD HALF-CELL series is produced with bifacial high efficiency multi-bus bar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Anti-PID Resistance

Prominent anti PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass, the module has stronger performance under low light circumstances.



High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

Full range of products and certification systems

ISO 9001 ISO14001 TUV CE INMETRO RETIE IEC61215/61730




LINEAR PERFORMANCE WARRANTY

12 year Product Warranty / 30 year Linear Power Warranty


RS9H-M-BD

GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER

Dimension of PV Modules Unit: mm

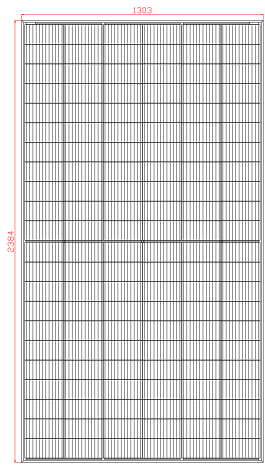


Front View

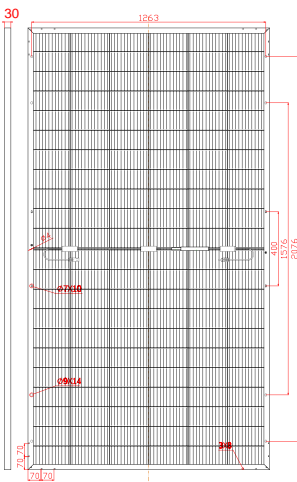


Back View

I-V CURVES OF PV MODULE(665 W)

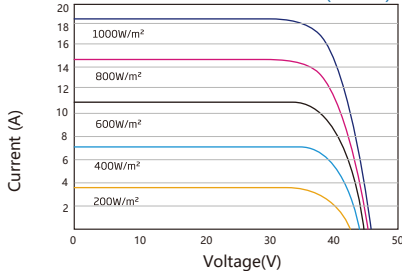

P-V CURVES OF PV MODULE(665W)

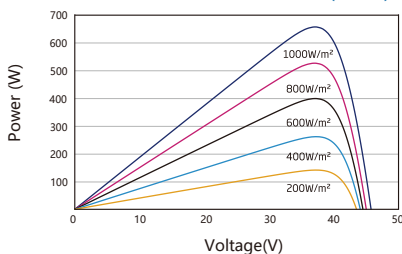

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	660	665	670
Open Circuit Voltage-Voc(V)	45.70	45.90	46.10
Short Circuit Current-Isc(A)	18.53	18.57	18.62
Maximum Power Voltage-Vmp(V)	37.80	38.00	38.20
Maximum Power Current-Imp(A)	17.46	17.50	17.54
Module Efficiency (%)	21.3%	21.4%	21.57%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax (Wp)	500	504	508
Open Circuit Voltage-Voc (V)	43.00	43.20	43.40
Short Circuit Current-Isc (A)	14.92	14.96	15.01
Maximum Power Voltage-Vmp(V)	35.30	35.40	35.50
Maximum Power Current-Imp(A)	14.17	14.22	14.26

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

BIFACIAL OUTPUT-REAR SIDE POWER GAIN

5%	pmax module Efficiency(%)	693W	698W	704W
		22.31%	22.48%	22.65%
15%	pmax module Efficiency(%)	759W	765W	771W
		24.43%	24.62%	24.80%
25%	pmax module Efficiency(%)	825W	831W	838W
		26.56%	26.76%	26.96%

MECHANICAL DATA

Solar cells	Bifacial Mono-crystalline 210*105mm,10/12 Bus Bars
Cell configuration	132cells(6*22)
Module dimensions	2384*1303*30mm
Weight	32.3kg
Front Cover	3.2mm Tempered Glass
Frame Material	Anodized Aluminum Alloy
J-BOX	IP68,3 diodes
Cable	4mm ² (IEC)/12AWG(UL),350mm(+)/450mm(-) or customized
Connectors	MC4 or MC4 Comparable

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficient of Voc	- 0.26%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	- 0.35%/°C
Operational Temperature	- 40~+85°C
Maximum System Voltage	1500V(IEC)/1500V(UL)
Max Series Fuse Rating	30A
Limiting Reverse Current	30A

PACKING DETAILS

Loading Capacity	648pcs/40HQ
Packing Manner	36pcs/pallet
Package Number	18pallets

SUZHOU KINSPIRE ENERGY CO., LTD.

Room 5163, West Side of 5th Floor, No. 4 Standard Workshop, No. 165 South Dongwu Road, Economic Development Zone, Wuzhong District, Suzhou, China

E: info@kinspire-energy.com
W: www.kinspire-energy.com