


120 Cells
Mono Half-Cell 9BB

355-380 W
Power output

20.90%
The Highest Efficiency

0~ +5W
Tolerance

0.5% Annual Degradation over 30 years

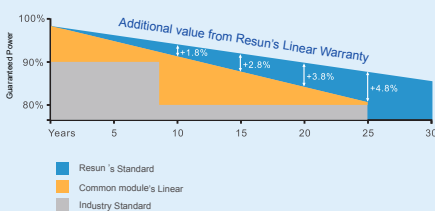

LINEAR PERFORMANCE WARRANTY
12 year Product Warranty / 30 year Linear Power Warranty

RS7K-M FULL BLACK

RS7K-M HALF-CELL series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect. The full black design makes the module appearance outstanding and ideal for building installations.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Aesthetic Design

The full black module is aesthetically designed with outstanding and premium visual appearance.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass, the module has stronger performance under low light circumstances.



High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

Full range of products and certification systems

ISO9001 TUV PID-FREE CE IEC 61215/61730/61701/62716




RS7K-M FULL BLACK




GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER


Dimension of PV Modules Unit: mm

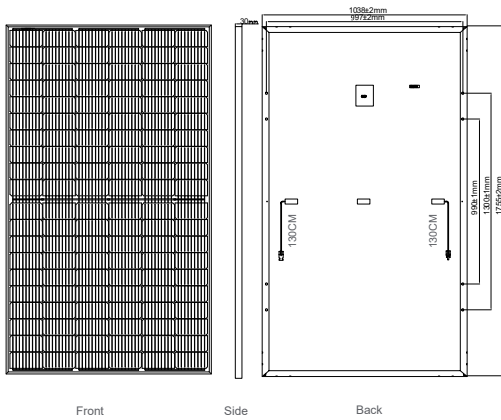

Current-Voltage Curve (RS7K-370M)

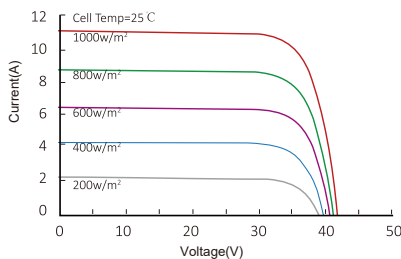

Power-Voltage Curve (RS7K-370M)

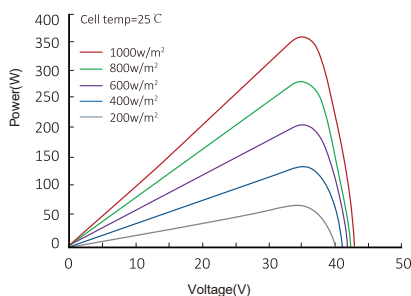

Partner information

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	355W	360W	365W	370W	375W	380W
Open Circuit Voltage-Voc(V)	40.30V	40.50V	40.70V	40.90V	41.10V	41.30V
Short Circuit Current-Isc(A)	11.31A	11.39A	11.46A	11.53A	11.60A	11.69A
Maximum Power Voltage-Vmp(V)	33.90V	34.10V	34.20V	34.40V	34.60V	34.80V
Maximum Power Current-Imp(A)	10.48A	10.56A	10.67A	10.76A	10.84A	10.92A
Module Efficiency(%)	19.50%	19.80%	20.00%	20.30%	20.60%	20.90%

STC: Irradiance 1000 W/m², Cell Temperature 25 °C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Rated Power in Watts-Pmax(Wp)	263W	266.7W	270.4W	274.1W	277.8W	281.5W
Open Circuit Voltage-Voc(V)	37.60V	37.80V	38.00V	38.20V	38.40V	38.50V
Short Circuit Current-Isc(A)	9.07A	9.15A	9.22A	9.29A	9.35A	9.42A
Maximum Power Voltage-Vmp(V)	31.20V	31.40V	31.60V	31.80V	32.00V	32.10V
Maximum Power Current-Imp(A)	8.43A	8.49A	8.56A	8.63A	8.69A	8.76A

NOCT: Irradiance at 800 W/m², Ambient Temperature 20 °C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar Cells	Half-Cell Mono 166x83mm, 9 Bus bars
Cell Configuration	120 Cells (6x20)
Module Dimensions	1755x1038x30mm
Weight	19KGS
Front Cover	3.2mm Tempered Glass
Frame Material	Anodized Aluminum Alloy
J-BOX	IP67 or IP68, 3 Diodes
Cable	4mm ² (IEC)/12AWG(UL), 130cm(customized)
Connectors	MC4 or MC4 Comparable
Standard Packaging	36pcs/pallet

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45 °C±2 °C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.34%/°C
Operational Temperature	-40~+85 °C
Maximum System Voltage	1500V(IEC)
Max Series Fuse Rating	20A

PACKAGING CONFIGURATION

Packing Type	40HQ
Piece/Pallet	988pcs
Pallet/Container	36pcs/pallet, 2pcs/carton
Piece/Container	26pallets + 26cartons

SUZHOU KINSPIRE ENERGY CO., LTD.

Room 5163, West Side of 5th Floor, No. 4 Standard Workshop, No. 165 South Dongwu Road, Economic Development Zone, Wuzhong District, Suzhou, China

E: info@kinspire-energy.com
W: www.kinspire-energy.com